Matrix Reordering Methods for Table and Network Visualization

—

Appendix A: Algorithm Fingerprints Comparative Overview

Michael Behrisch[1], Benjamin Bach[2], Nathalie Henry-Riche[3], Tobias Schreck[4], Jean-Daniel Fekete[5]

[1]Universität Konstanz, Germany
[2]Microsoft Research-Inria Joint Centre, France
[3]Microsoft Research, USA
[4]University of Technology Graz, Austria
[5]Inria, France

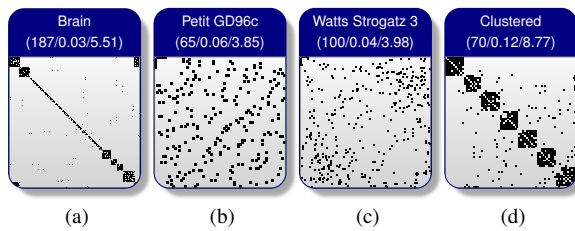**Appendix A:** Algorithm Fingerprints Comparative Overview

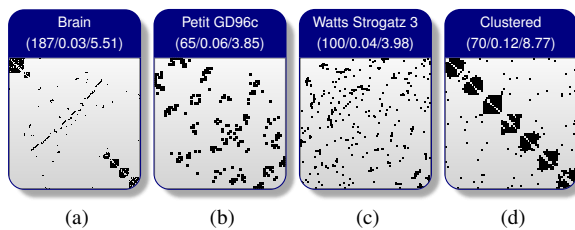Figure 1: Exemplified reordering results for Bipolarization.
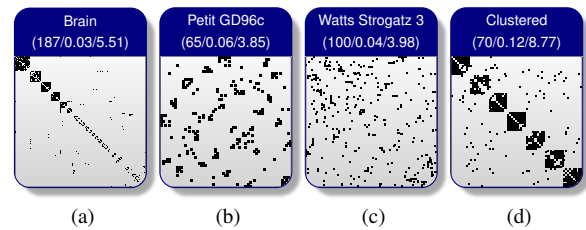

Figure 2: Exemplified reordering results for RSERI-ATIONOLO.

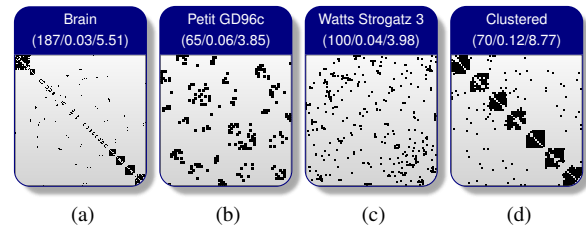Figure 3: Exemplified reordering results for RSERI-ATIONHC.

Figure 4: Exemplified reordering results for RSERI-ATIONGW.
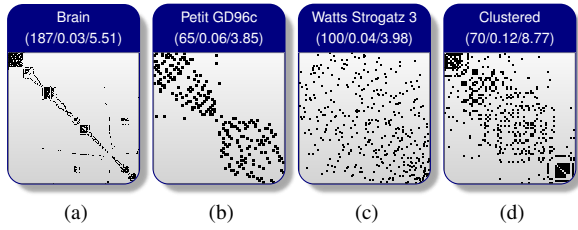
Figure 5: Exemplified reordering results for RCorrplotSortingFPC.
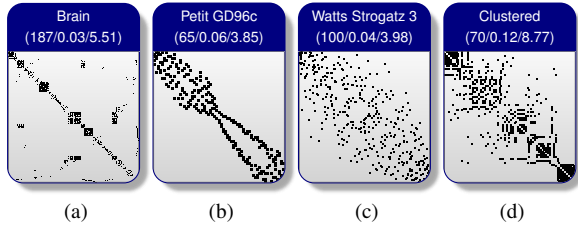

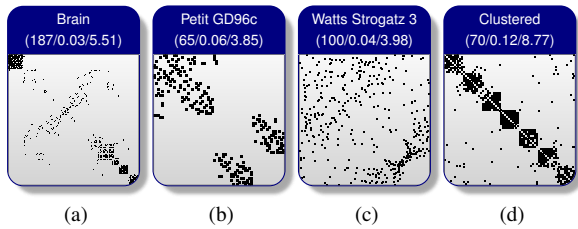Figure 6: Exemplified reordering results for RCorrplotSortingAOE.

Figure 7: Exemplified reordering results for RSeriationCHEN.
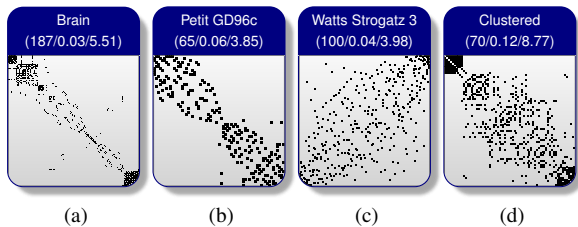

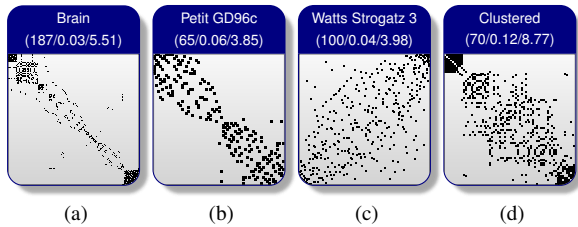Figure 8: Exemplified reordering results for RSeriationPCA.

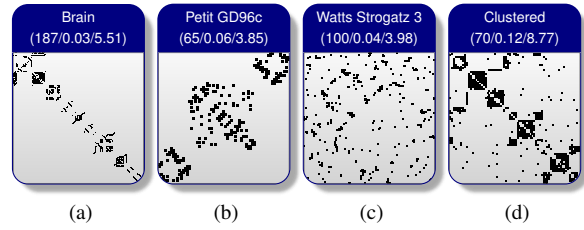Figure 9: Exemplified reordering results for RSeriationMDS.

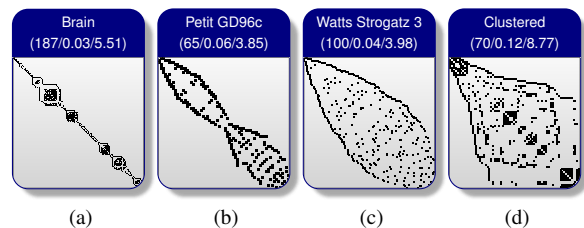Figure 10: Exemplified reordering results for RSERIATIONBEA.

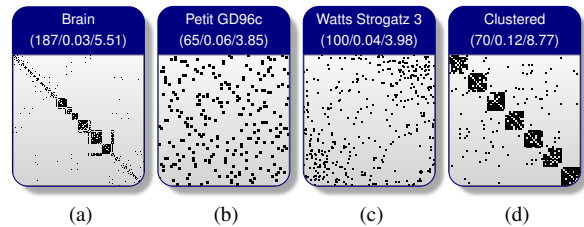Figure 11: Exemplified reordering results for CuthillMcKee.

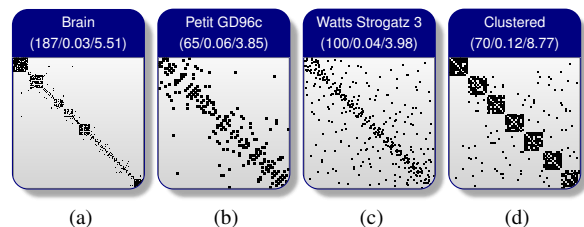Figure 12: Exemplified reordering results for Reverse-CuthillMcKee.

Figure 13: Exemplified reordering results for Multi-Scale.
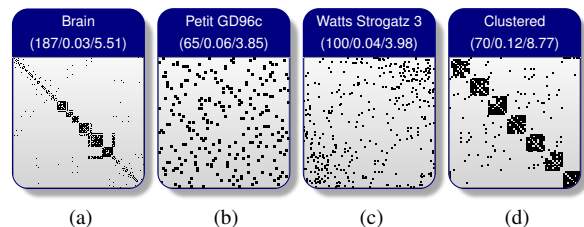

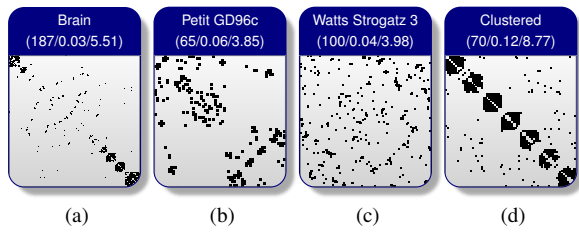Figure 14: Exemplified reordering results for Sloan.

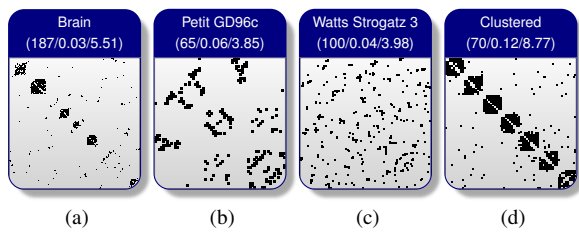Figure 15: Exemplified reordering results for RSeriationTSP.

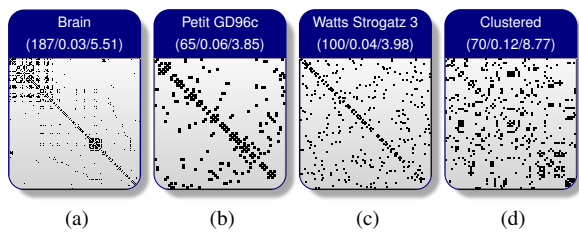Figure 16: Exemplified reordering results for RSeriation-BEATSP.

Figure 17: Exemplified reordering results for MultipleFragment.